

# JETPAN

SPEED GATES

Jetpan – the speed gate with high glass retractable flaps and a reliable mechanism with a brushless motor. The combination of high glass flaps along with safety sensors prevents climbing over the turnstile and perfectly suits for creation of protected areas.

User-friendly interface, high-quality materials, safety sensors, anti-tailgate detection, compatibility with any access control system, possibility of various biometric devices integration, unlimited number of lane configurations and high glass flaps - a perfect balance of style, performance and security.



**HIGHER WINGS FOR HIGHER LEVEL OF PROTECTION**  
**IDEAL SOLUTION FOR ANY DEMANDING SITE**

500  
mm  
PASSAGE WIDTH

30  
pers/min  
SINGLE ACCESS FLOW RATE

60  
pers/min  
FREE ACCESS FLOW RATE

0,7  
sec  
OPENING / CLOSING

41  
PROTECTIVE LEVEL

ANTI-TAILGATING

BI-DIRECTIONAL

ACCESS CONTROL SYSTEM

MANUAL CONTROL

## Key features:

- BMDrive® - a reliable mechanism with a powerful BLDC gear motor ensures long-term, maintenance-free operation.
- Low power consumption.
- An innovative controller with an OLED display and buttons allows for easy setup and configuration without the need for special programmers.
- Digital control of force and leaf speed, combined with safety sensors, prevents accidents and ensures the safety of individuals, even in cases of unauthorized passage.
- The sensor system enables the detection of individuals with luggage or allows for a free exit without the need for identification.
- Elegant cabinets come equipped with integrated LED lighting that displays the access status and card reader area.
- The housing design and top lid can be customized to meet specific preferences.
- Can be seamlessly integrated with any type of access control system.
- A wired remote control panel is included as part of the standard kit.
- The speed gate is equipped with a smart self-diagnostic system.
- In the event of a power failure, the leaves can be manually opened (fail-safe).



[www.tiso.global](http://www.tiso.global)  
+380 (44) 291-21-11  
[sales@tiso.global](mailto:sales@tiso.global)




CE UK  
CA

# TECHNICAL SPECIFICATIONS /

|                             |   |
|-----------------------------|---|
| Model                       | Jetpan 500  |
| Cabinet width, mm           | 239   |
| Cabinet length, mm          | 1006  |
| Cabinet height, mm          | 1000  |
| Leaves height, mm           | 1520/1800   |
| Passage width, mm           | 500   |
| Opening/closing time, sec   | 0,7   |
| Mechanism                   | BMDrive® servodrive (BLDC)                            |
| Blocking system             | DeadLock®   |
| Emergency mode (fire-alarm) | Free entry/exit (leaves are opened automatically)     |
| Power fail                  | Fail safe (gates could be opened manually — standard) |
| MCBF, cycles                | 10 000 000  |
| MTTR, min                   | < 25  |

## Electrical Specifications:

|                              |   |
|------------------------------|---|
| Maximum power consumption, W | 160   |
| Voltage                      | From the AC (100-240)V, 50/60Hz; from a DC source 12 V                                |
| Indication                   | DotLights®, RFIDLights®, LeafLights®  |
| <b>Finishing</b>             |   |
| Standard housing             | Brushed SS AISI 304   |
| Available housing            | Brushed SS AISI 316; Polished SS AISI 304; Polished SS AISI 316;<br>Powder coated RAL |

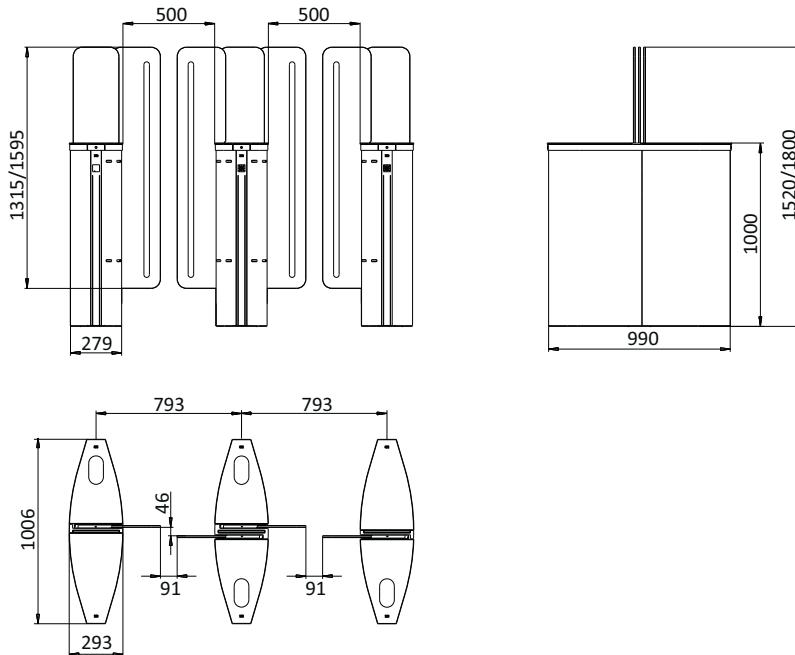

Dimensions for solid glass top lid

Specifications are subject to change without prior notice

[www.tiso.global](http://www.tiso.global)

+380 (44) 291-21-11


[sales@tiso.global](mailto:sales@tiso.global)

# STANDARD FEATURES /



## LED INDICATIONS

Introducing our RFIDLight® and DotLight® features, designed to captivate attention and enhance user experience:  
 RFIDLight®: Illuminates card reader area.  
 DotLight®: Displays access status.

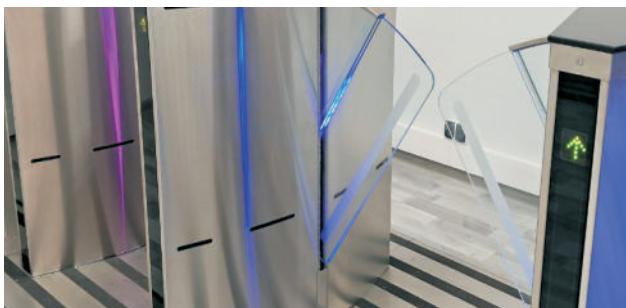

## SAFETY SENSORS, ANTI-TAILGATING FUNCTION

Our high-precision sensors excel in identifying unauthorized passage, effectively preventing tailgating by detecting two or more individuals. Additionally, our safety sensors ensure secure passage for individuals with luggage or trolleys, ensuring gates remain open until the passage is completed.



## UPS FUNCTION

Introducing our advanced UPS system, seamlessly integrated to automatically switch power to the backup battery during outages. This ensures uninterrupted functionality of our speed gate, empowering you to utilize all features even in the event of a power failure.



## CONTROL PANEL


Included in the standard set, our wired control panel offers versatile functionality:  
 Facilitates single passage and free passage modes.  
 Enables access blocking and activation of the anti-panic function.



## LEAFLIGHT®

Experience the striking illumination of our leaves, available in three standard colors to signify passage status:

- Blue: For standby mode.
- Green: Signifying access authorization.
- Red: Denoting access denial.
- Custom colors are also available upon request.

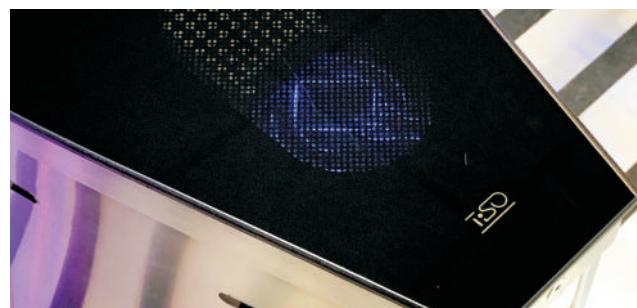

## PLACE FOR RFID INSTALLATION

RFID installation space included in standard speedgate configuration.

# ADDITIONAL OPTIONS /



## PATTERN APPLICATION

Customize your speed gates with unique signatures, patterns, logos, and more, seamlessly placed on the leaves, housing, or top lid for a distinctive touch.



## INTEGRATION OF CUSTOMISED ACS

Seamless integration of various access control systems upon request, including RFID devices, coin acceptor push buttons, fingerprint scanners, face recognition, barcode readers, and QR code readers.



## CARD COLLECTOR INTEGRATION

Integration of automatic card collector directly into the speed gate housing is possible.



## MP3 AUDIO MODULE

Enjoy a comprehensive audio signaling system for various gate events: access / authorised access/ closing / opening / alarm.



## TWIC WIRELESS CONTROL PANEL

TiSO TWIC offers remote control for multiple lines of turnstiles. With its space-saving 10" touchscreen display, it can be conveniently placed at reception desks or within security control areas.



## PASS COUNTER

Automatically counts the number of passes for efficient tracking and management.



## FOOTPRINT ILLUMINATION

Illuminate the footprint of the speed gate housing with LED lighting. Customize the color of the light to suit your preferences.



## SUPER CAPASITOR


Ensure uninterrupted operation with our free power package, enabling emergency automatic one-time opening of the speed gate.



## EXIT BUTTON

Introducing a convenient touch-free button option for organizing exits effortlessly.

# ADDITIONAL OPTIONS /

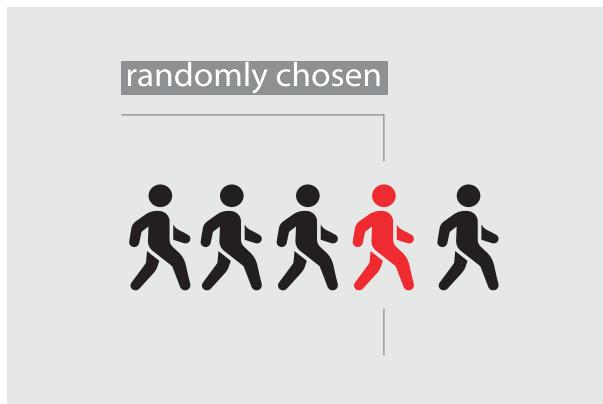

## RANDOMISER

This mechanism autonomously selects individuals for verification without human intervention, ensuring impartiality.



## MOBILE PLATFORM

Enables rapid temporary installation of the speed gate, ideal for areas where floor drilling is not possible.



## RFID READERS T-PROX MINI

The reader is compatible with 125 kHz cards, Mifare, Mifare Plus, as well as mobile credentials U-Prox ID via NFC and 2.4 GHz radio.



## ALARM BUZZER

Audible alarm activated upon unauthorized access.